

HERCULES HOISTS LIMITED



Medium Duty Wire Rope Hoist WRH-N series

- ◆ Lifting
- ◆ Moving
- ◆ Storing

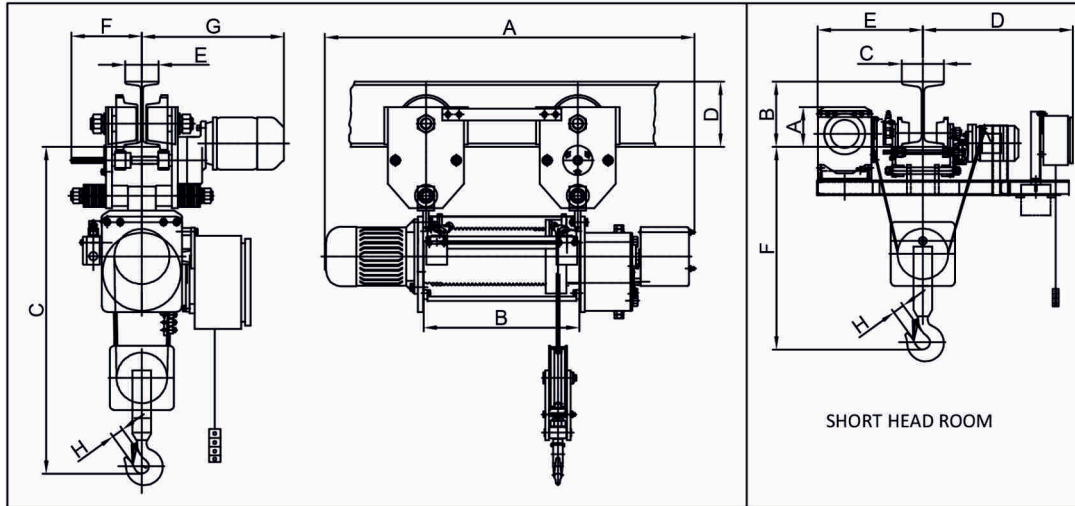


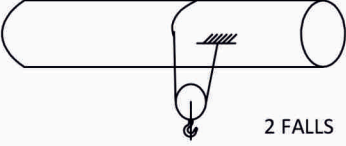

- ▶ Capacity Range
From 1 T SWL to 3 T SWL
- ▶ German origin, Medium duty application design
Built for smooth operation for various applications
- ▶ Proven design with guaranteed safety and reliability
- ▶ Precision machine cut case hardened alloy steel gears
Low noise operations through out life
- ▶ Unique and sturdy rope guide arrangement
Prevents rope slackening
- ▶ Seamless pipe accurately machined rope drum
Long life to hoist
- ▶ Optional design available for hazardous area application
Extended application capability

Material Handling. Delivered.

Redefining Material Handling. Since 1962.

WRH N & WRH NO - WIRE ROPE HOISTS



	Capacity (SWL)	MT	WRH NO			WRH N					
			1			2			3		
Lift		Mtrs.	6	9	12	5.2	8.2	11.2	3.4	5.4	7.4
A		mm	995	1125	1255	1020	1145	1275	1020	1145	1275
B	Drum Length	mm	417	546	675	385	514	643	385	514	643
	Approx. Weight	Kg	164	175	180	225	240	255	300	315	330
	Min. Req. Curvature Radius (mm)	mm	650	850	1100	600	800	1000	600	800	1000
	No. of Falls		 2 FALLS			 3 FALLS					
	Rope Dia.	mm	8			10			10		
	Hoist Speed	MPM	5			5			3.3		
	Trolley Speed	MPM	15			15			15		
	Hoist Motor	HP(KW)/RPM	1.5 (1.11)/1500			3 (2.2)/3000			3 (2.2)/3000		
	Trolley Motor	HP(KW)/RPM	0.5 (0.37)/1000			0.5 (0.37)/1000			0.5 (0.37)/1000		
	Trolley Wheel Dia./Qty.	mm (Nos.)	113/4			113/4			113/4		
C	Head Room	mm	1000			1200			1450		
D	Min. Beam Height	mm	175			175			175		
E	Beam Flange	mm	90-210			90-210			90-210		
F		mm	190			190			190		
G		mm	575			575			575		
H		mm	31			34			42		

SHORT HEAD ROOM MODEL (Optional)

Model	Capacity	A (Max.)	B (Min.)	C		D (Max.)	E (Max.)	F (Min.)
				(Min.)	(Max.)			
WRH NO	1	200	250	125	210	600	500	500
WRH N	2	200	250	125	210	730	500	600

All dimensions are in mm

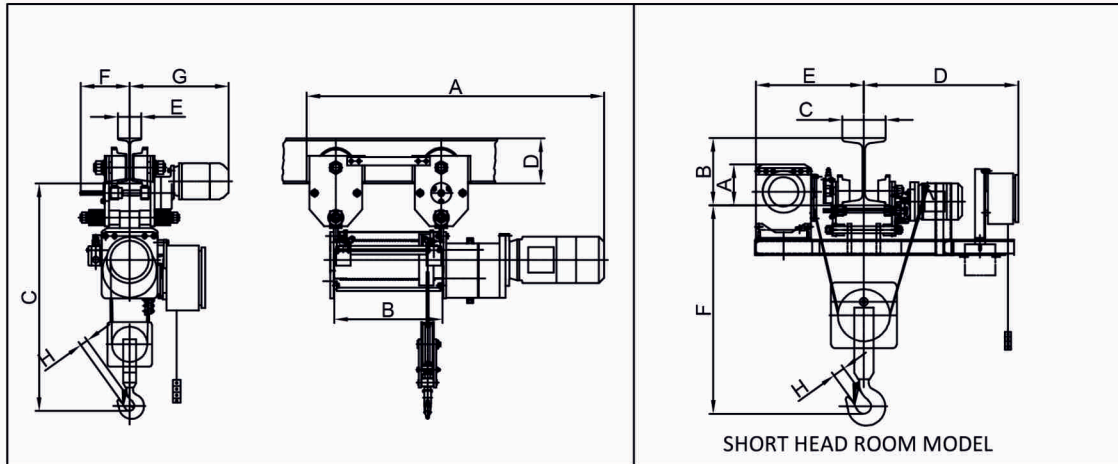
Data Tolerance $\pm 10\%$.

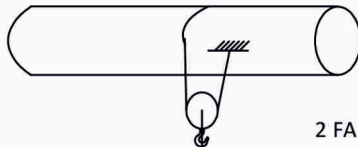

NOTES:

1. ♦ Optional travelling speed of 7.5/3.25/2.5 m/min. can be offered.
2. Check "I" Beam mounting arrangements, trolley plates will project 10mm above 'I' beam, if beam height is 150 mm.
3. SHR Model is suitable for straight path only boggie can be supplier on request.
4. ♦ Radius of curvature should not be S type or Z type bend with 90 Degree sharp bend.

Note :- Due To Continuous development and improvement specification listed above may be changed without notice.

WRH NO-HL & WRH N-HL WIRE ROPE HOISTS



		WRH NO-HL		WRH N-HL				
Capacity (SWL)	MT	1		2		3		
Lift	Mtrs.	18	25	17.2	25	11.4	16.5	
A	mm	1682	1984	1635	1960	1635	1960	
B	Drum Length	mm	933	1235	897	1235	897	1235
	Approx. Weight	Kg	200	250	300	350	360	400
	Min. Req. Curvature Radius (mm) ◆	mm	2500	3000	2500	3000	2500	3000
	No. of Falls	 2 FALLS			 3 FALLS			
	ROPE DIA.	mm	8	10	10	10	10	
	Hoist Speed	MPM	5	5	5	3.3	3.3	
	Trolley Speed ◆	MPM	15	15	15	15	15	
	Hoist Motor	HP(KW)/RPM	1.5 (1.11)/1500		3 (2.2)/1500		3 (2.2)/1500	
	Trolley Motor	HP(KW)/RPM	0.5 (0.37)/1000		0.5 (0.37)/1000		0.5 (0.37)/1000	
	Trolley Wheel (Dia./Qty.)	mm/nos	113(4)		113(4)		113(4)	
C	Head Room	mm	1000	1200	1200	1450	1450	
D	Min. Beam Height	mm	175	175	175	175	175	
E	Beam Flange	mm	90-210	90-210	90-210	90-210	90-210	
F		mm	189	189	189	189	189	
G		mm	566	566	566	566	566	
H		mm	31.5	34	34	42	42	

SHORT HEAD ROOM MODEL (Optional)

Model	Capacity	A (Max.)	B (Min.)	C		D (Max.)	E (Max.)	F (Min.)
				(Min.)	(Max.)			
WRH NO-HL	1	200	300	140	210	800	500	500
WRH N-HL	2	200	300	140	210	850	500	600

Data Tolerance ±10%.

All dimensions are in mm

NOTES:

- ◆ Optional travelling speed of 7.5/3.25/2.5 m/min. can be offered.
- Check "I" Beam mounting arrangements, trolley plates will project 10mm above 'I' beam, if beam height is 150 mm.
- SHR Model is suitable for straight path only boggie can be supplier on request.
- ◆ Radius of curvature should not be S type or Z type bend with 90 Degree sharp bend.

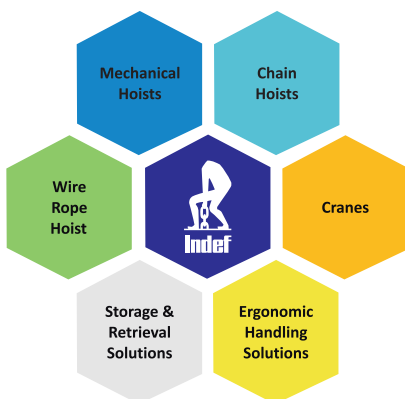
Note :- Due To Continuous development and improvement specification listed above may be changed without notice.

www.indef.com

Note :- Due to continuous development and improvement specification listed above may be changed without notice.

HHL/Product Name/2021 14 10/V2

bajaj group



HERCULES HOISTS LIMITED

43/2B, Savrioli-Kharpada Road, Dhamani, Khalapur - 410 202, Maharashtra, India
Regional offices: **Chennai | Kolkata | New Delhi | Pune**
Tel :+91 (0)2192 662511 | Fax: +91 (0) 2192 662504
www.indef.com | enquire@indef.com